

FortiAnalyzer - Release Notes

VERSION 5.4.3

FORTINET DOCUMENT LIBRARY

<http://docs.fortinet.com>

FORTINET VIDEO GUIDE

<http://video.fortinet.com>

FORTINET BLOG

<https://blog.fortinet.com>

CUSTOMER SERVICE & SUPPORT

<https://support.fortinet.com>

FORTIGATE COOKBOOK

<http://cookbook.fortinet.com>

FORTINET TRAINING SERVICES

<http://www.fortinet.com/training>

FORTIGUARD CENTER

<http://www.fortiguard.com>

END USER LICENSE AGREEMENT

<http://www.fortinet.com/doc/legal/EULA.pdf>

FEEDBACK

Email: techdocs@fortinet.com



May 18, 2017

FortiAnalyzer - Release Notes

05-543-416438-20170518

TABLE OF CONTENTS

Change Log	5
Introduction	6
Supported models	6
Special Notices	7
Hyper-V FortiAnalyzer-VM running on an AMD CPU	7
IPsec connection to FortiOS for logging	7
Datasets Related to Browse Time	7
System Configuration or VM License is Lost after Upgrade	7
SSLv3 on FortiAnalyzer-VM64-AWS	8
No support for remote SQL database	8
Pre-processing logic of ebtime	8
Log Aggregation or Forwarding	8
Upgrade Information	9
Upgrading to FortiAnalyzer 5.4.3	9
Downgrading to previous versions	9
Firmware image checksums	9
FortiAnalyzer VM firmware	9
SNMP MIB files	11
Product Integration and Support	12
FortiAnalyzer version 5.4.3 support	12
Feature support	14
FortiGate Management	14
Language support	15
Supported models	16
Resolved Issues	24
Device Manager	24
Event Management	24
Logging	24
Reporting	25
System Settings	25
Others	25
Common Vulnerabilities and Exposures	26

Known Issues 27

FortiView27

Reporting27

System Settings27

Others27

Change Log

Date	Change Description
2017-05-18	Initial release of 5.4.3.

Introduction

This document provides the following information for FortiAnalyzer version 5.4.3 build 1187:

- [Supported models](#)
- [Special Notices](#)
- [Upgrade Information](#)
- [Product Integration and Support](#)
- [Resolved Issues](#)
- [Known Issues](#)

For more information on upgrading your FortiAnalyzer device, see the *FortiAnalyzer Upgrade Guide*.

Supported models

FortiAnalyzer version 5.4.3 supports the following models:

FortiAnalyzer	FAZ-200D, FAZ-300D, FAZ-400E, FAZ-1000C, FAZ-1000D, FAZ-1000E, FAZ-2000B, FAZ-2000E, FAZ-3000D, FAZ-3000E, FAZ-3000F, FAZ-3500E, FAZ-3500F, FAZ-3900E, and FAZ-4000B.
FortiAnalyzer VM	FAZ-VM64, FAZ-VM64-AWS, FAZ-VM64-Azure, FAZ-VM64-HV, FAZ-VM64-KVM, and FAZ-VM64-XEN (Citrix XenServer and Open Source Xen).

Special Notices

This section highlights some of the operational changes that administrators should be aware of in FortiAnalyzer version 5.4.3.

Hyper-V FortiAnalyzer-VM running on an AMD CPU

A Hyper-V FAZ-VM running on a PC with an AMD CPU may experience a kernel panic. Fortinet recommends running VMs on an Intel-based PC.

IPsec connection to FortiOS for logging

FortiAnalyzer 5.4.2 no longer supports an IPsec connection with FortiOS 5.0/5.2. However UDP or TCP + reliable are supported.

Instead of IPsec, you can use the FortiOS reliable logging feature to encrypt logs and send them to FortiAnalyzer. You can enable the reliable logging feature on FortiOS by using the `configure log fortianalyzer setting` command. You can also control the encryption method on FortiOS by using the `set enc-algorithm default/high/low/disable` command.

FortiAnalyzer 5.4.1 and earlier does support IPsec connection with FortiOS 5.0/5.2.

Datasets Related to Browse Time

FortiAnalyzer 5.4.2 contains enhancements to calculating the estimated browse time. Due to the changes, cloned datasets that query for browse time may not be able to return any results after upgrade.

System Configuration or VM License is Lost after Upgrade

When upgrading FortiAnalyzer from 5.4.0 or 5.4.1 to 5.4.2, it is imperative to reboot the unit before installing the 5.4.2 firmware image. Please see the *FortiAnalyzer Upgrade Guide* for details about upgrading. Otherwise, FortiAnalyzer may lose system configuration or VM license after upgrade. There are two options to recover the FortiAnalyzer unit:

1. Reconfigure the system configuration or add VM license via CLI with `execute add-vm-license <vm license>`.
2. Restore the 5.4.0 backup and upgrade to 5.4.2.

SSLv3 on FortiAnalyzer-VM64-AWS

Due to known vulnerabilities in the SSLv3 protocol, FortiAnalyzer-VM64-AWS only enables TLSv1 by default. All other models enable both TLSv1 and SSLv3. If you wish to disable SSLv3 support, please run:

```
config system global
    set ssl-protocol tlsv1
end
```

No support for remote SQL database

Starting with FortiAnalyzer software versions 5.0.7 and 5.2.0, remote SQL database support will only cover the insertion of log data into the remote MySQL database. Historical log search and reporting capabilities, which rely on the remote SQL data, will no longer be supported.

Those wishing to use the full set of FortiAnalyzer features are encouraged to switch as soon as possible to storing SQL data locally on the FortiAnalyzer. The local database can be built based upon existing raw logs already stored on the FortiAnalyzer.

Pre-processing logic of ebtime

Logs with the following conditions met are considered usable for the calculation of estimated browsing time:

Traffic logs with `logid` of 13 or 2, when `logid == 13`, `hostname` must not be empty. The `service` field should be either HTTP, 80/TCP or 443/TCP.

If all above conditions are met, then `devid`, `vdom`, and `user` (`srcip` if `user` is empty) are combined as a key to identify a user. For time estimation, the current value of `duration` is calculated against history session start and end time, only un-overlapped part are used as the `ebtime` of the current log.

In version 5.0.5 or later, Explicit Proxy logs (`logid=10`) are checked when calculating the estimated browsing time.

Log Aggregation or Forwarding

Log aggregation or forwarding works from 5.4 to 5.4 or 5.4.1 to 5.4.1. Please use the same FortiAnalyzer version on all the units. Other FortiAnalyzer versions not supported.

Upgrade Information

Upgrading to FortiAnalyzer 5.4.3

You can upgrade FortiAnalyzer 5.2.0 or later directly to 5.4.3. If you are upgrading from versions earlier than 5.2.0, you will need to upgrade to FortiAnalyzer 5.2 first. (We recommend that you upgrade to 5.2.9, the latest version of FortiAnalyzer 5.2.)



For details about upgrading your FortiAnalyzer, see *FortiAnalyzer Upgrade Guide*.

Downgrading to previous versions

FortiAnalyzer does not provide a full downgrade path. You can downgrade to a previous firmware release via the GUI or CLI, but doing so results in configuration loss. A system reset is required after the firmware downgrading process has completed. To reset the system, use the following CLI commands via a console port connection:

```
execute reset all-settings
execute format {disk | disk-ext4}
```

Firmware image checksums

The MD5 checksums for all Fortinet software and firmware releases are available at the Customer Service & Support portal, <https://support.fortinet.com>. To verify the integrity of the download, select the *Checksum* link next to the *HTTPS* download link. A dialog box will be displayed with the image file name and checksum code. Compare this checksum with the checksum of the firmware image.

FortiAnalyzer VM firmware

Fortinet provides FortiAnalyzer VM firmware images for Amazon AWS, Citrix and Open Source XenServer, Linux KVM, Microsoft Hyper-V Server, and VMware ESX/ESXi virtualization environments.

Amazon Web Services

- The 64-bit Amazon Machine Image (AMI) is available on the AWS marketplace.

Citrix XenServer and Open Source XenServer

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.OpenXen.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains the QCOW2 file for the Open Source Xen Server.
- `.out.CitrixXen.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains the Citrix XenServer Disk (VHD), and OVF files.

Linux KVM

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.kvm.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains QCOW2 that can be used by qemu.

Microsoft Azure

The files for Microsoft Azure have AZURE in the filenames, for example `FAZ_VM64_AZURE-v<number>-build<number>-FORTINET.out.hyperv.zip`.

- `.out`: Download the firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.hyperv.zip`: Download the package for a new FortiAnalyzer VM installation. This package contains a Virtual Hard Disk (VHD) file for Microsoft Azure.

Microsoft Hyper-V Server

The files for Microsoft Hyper-V Server have HV in the filenames, for example, `FAZ_VM64_HV-v<number>-build<number>-FORTINET.out.hyperv.zip`.

- `.out`: Download the firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.hyperv.zip`: Download the package for a new FortiAnalyzer VM installation. This package contains a Virtual Hard Disk (VHD) file for Microsoft Hyper-V Server.



Microsoft Hyper-V 2016 is supported.

VMware ESX/ESXi

- `.out`: Download either the 64-bit firmware image to upgrade your existing VM installation.
- `.ovf.zip`: Download either the 64-bit package for a new VM installation. This package contains an Open Virtualization Format (OVF) file for VMware and two Virtual Machine Disk Format (VMDK) files used by the OVF file during deployment.



For more information see the FortiManager product data sheet available on the Fortinet web site, <http://www.fortinet.com/products/fortimanager/virtual-security-management.html>. VM installation guides are available in the [Fortinet Document Library](#).

SNMP MIB files

You can download the *FORTINET-FORTIMANAGER-FORTIANALYZER.mib* MIB file in the firmware image file folder. The Fortinet Core MIB file is located in the main FortiAnalyzer v5.00 file folder.

Product Integration and Support

FortiAnalyzer version 5.4.3 support

The following table lists FortiAnalyzer version 5.4.3 product integration and support information:

Web Browsers	<ul style="list-style-type: none">• Microsoft Internet Explorer version 11• Mozilla Firefox version 53• Google Chrome version 58 <p>Other web browsers may function correctly, but are not supported by Fortinet.</p>
FortiOS/FortiOS Carrier	<ul style="list-style-type: none">• 5.6.0• 5.4.0 to 5.4.4• 5.2.0 to 5.2.10• 5.0.4 to 5.0.12
FortiAnalyzer	<ul style="list-style-type: none">• 5.4.0 to 5.4.3• 5.2.0 to 5.2.11• 5.0.0 to 5.0.13
FortiCache	<ul style="list-style-type: none">• 4.2.2• 4.1.3• 4.0.4
FortiClient	<ul style="list-style-type: none">• 5.4.3• 5.2.0 and later• 5.0.4 and later
FortiMail	<ul style="list-style-type: none">• 5.3.9• 5.2.9• 5.1.6• 5.0.10
FortiManager	<ul style="list-style-type: none">• 5.4.0 to 5.4.3• 5.2.0 and later• 5.0.0 and later

FortiSandbox	<ul style="list-style-type: none">• 2.3.2• 2.2.2• 2.1.3• 2.0.3• 1.4.0 and later• 1.3.0• 1.2.0 and 1.2.3
FortiSwitch ATCA	<ul style="list-style-type: none">• 5.0.0 and later• 4.3.0 and later• 4.2.0 and later
FortiWeb	<ul style="list-style-type: none">• 5.8.0• 5.6.0• 5.5.4• 5.4.1• 5.3.8• 5.2.4• 5.1.4• 5.0.6
FortiDDoS	<ul style="list-style-type: none">• 4.3.1• 4.2.3• 4.1.12
FortiAuthenticator	<ul style="list-style-type: none">• 4.3.2• 4.2.0
Virtualization	<ul style="list-style-type: none">• Amazon Web Service AMI, Amazon EC2, Amazon EBS• Citrix XenServer 6.2• Linux KVM Redhat 6.5• Microsoft Azure• Microsoft Hyper-V Server 2008 R2, 2012 & 2012 R2• OpenSource XenServer 4.2.5• VMware:<ul style="list-style-type: none">• ESX versions 4.0 and 4.1• ESXi versions 4.0, 4.1, 5.0, 5.1, 5.5, and 6.0



Always review the Release Notes of the supported platform firmware version before upgrading your device.

Feature support

The following table lists FortiAnalyzer feature support for log devices.

Platform	Log View	FortiView	Event Management	Reports
FortiGate	✓	✓	✓	✓
FortiCarrier	✓	✓	✓	✓
FortiAnalyzer	✓		✓	
FortiCache	✓		✓	✓
FortiClient registered to FortiGate	✓	✓		✓
FortiClient registered to FortiClient EMS	✓	✓		✓
FortiDDoS	✓	✓	✓	✓
FortiMail	✓		✓	✓
FortiManager	✓		✓	
FortiSandbox	✓		✓	✓
FortiWeb	✓		✓	✓
Syslog	✓		✓	

FortiGate Management

You can enable FortiManager features on some FortiAnalyzer models. FortiAnalyzer models with FortiManager features enabled can manage a small number of FortiGate devices, and all but a few FortiManager features are enabled on FortiAnalyzer. The following table lists the supported modules for FortiAnalyzer with FortiManager Features enabled:

FortiManager Management Modules	FortiAnalyzer with FortiManager Features Enabled
Device Manager	✓

FortiManager Management Modules	FortiAnalyzer with FortiManager Features Enabled
Policy & Objects	✓
AP Manager	✓
FortiClient Manager	✓
VPN Manager	✓
FortiGuard	
FortiMeter	
FGT-VM License Activation	

Language support

The following table lists FortiAnalyzer language support information.

Language	GUI	Reports
English	✓	✓
Chinese (Simplified)	✓	✓
Chinese (Traditional)	✓	✓
French		✓
Hebrew		✓
Hungarian		✓
Japanese	✓	✓
Korean	✓	✓
Portuguese		✓
Russian		✓
Spanish		✓

To change the FortiAnalyzer language setting, go to *System Settings > Admin > Admin Settings*, in *Administrative Settings > Language* select the desired language from the drop-down list. The default value is *Auto Detect*.

Russian, Hebrew, and Hungarian are not included in the default report languages. You can import language translation files for these languages via the command line interface using one of the following commands:

```
execute sql-report import-lang <language name> <ftp> <server IP address> <user name>
    <password> <file name>
execute sql-report import-lang <language name> <sftp> <server IP address> <user name>
    <password> <file name>
execute sql-report import-lang <language name> <scp> <server IP address> <user name>
    <password> <file name>
execute sql-report import-lang <language name> <tftp> <server IP address> <file name>
```

For more information, see the *FortiAnalyzer CLI Reference*.

Supported models

The following tables list which FortiGate, FortiCarrier, FortiDDoS, FortiAnalyzer, FortiMail, FortiManager, FortiWeb, FortiCache, and FortiSandbox models and firmware versions can log to a FortiAnalyzer appliance running version 5.4.3. Please ensure that the log devices are supported before completing the upgrade.

FortiGate models

Model	Firmware Version
<p>FortiGate: FG-30D, FG-30D-POE, FG-30E, FG-30E-3G4G-INTL, FG-30E-3G4G-NAM, FG-50E, FG-51E, FG-52E, FG-60D, FG-60D-POE, FG-60E, FG-61E, FG-70D, FG-70D-POE, FG-80C, FG-80CM, FG-80D, FG-80E, FG-80E-POE, FG-81E, FG-81E-POE, FG-90D, FG-90D-POE, FG-90E, FG-91E, FG-92D, FG-94D-POE, FG-98D-POE, FG-100D, FG-100E, FG-101E, FG-100EF, FG-140D, FG-140D-POE, FG-200D, FG-200D-POE, FG-240D, FG-240D-POE, FG-280D-POE, FG-200E, FG-201E, FGT-300D, FG-400D, FG-500D, FG-600C, FG-600D, FG-800C, FG-800D, FG-900D, FG-1000C, FG-1000D, FG-1200D, FG-1500D, FG-1500DT, FG-3000D, FG-3100D, FG-3200D, FG-3240C, FG-3600C, FG-3700D, FG-3700DX, FG-3810D, FG-3815D, FG-2000E, FG-2500E, FG-3800D, FG-7040E-1, FG-7040E-2, FG-7040E-3, FG-7040E-4, FG-7040E-5, FG-7040E-6, FG-7040E-8, FG-7060E-1, FG-7060E-2, FG-7060E-3, FG-7060E-4, FG-7060E-5, FG-7060E-6, FG-7060E-8</p> <p>FortiGate 5000 Series: FG-5001C, FG-5001D</p> <p>FortiGate DC: FG-80C-DC, FG-600C-DC, FG-800C-DC, FG-1000C-DC, FG-1500D-DC, FG-3000D-DC, FG-3100D-DC, FG-3200D-DC, FG-3240C-DC, FG-3600C-DC, FG-3700D-DC, FG-3800D-DC, FG-3810D-DC</p> <p>FortiGate Low Encryption: FG-80C-LENC, FG-100D-LENC, FG-600C-LENC, FG-1000C-LENC</p> <p>FortiWiFi: FWF-30D, FWF-30E, FWF-30E-3G4G-INTL, FWF-30E-3G4G-NAM, FWF-50E, FWF-50E-2R, FWF-51E, FWF-30D-POE, FWF-60D, FWF-60D-POE, FWF-90D, FWF-90D-POE, FWF-92D, FWF-60E, FWF-61E, FWF-80CM, FWF-81CM</p> <p>FortiGate VM: FG-VM, FG-VM64, FG-VM64-AWS, FG-VM64-AWSONDEMAND, FG-VM64-AZUREONDEMAND, FG-VM64-HV, FG-VM64-KVM, FG-VM64-XEN, FG-VMX-Service-Manager</p> <p>FortiGate Rugged: FGR-30D, FGR-35D, FGR-60D, FGR-90D</p>	5.4

Model	Firmware Version
FortiGate: FG-20C, FG-20C-ADSL-A, FG-30D, FG-30D-POE, FG-40C, FG-60C, FG-60C-POE, FG-60C-SFP, FG-60D, FG-60D-3G4G-VZW, FG-60D-POE, FG-70D, FG-70D-POE, FG-80C, FG-80CM, FG-80D, FG-90D, FG-90D-POE, FG-92D, FG-94D-POE, FG-98D-POE, FG-100D, FG-110C, FG-111C, FG-140D, FG-140D-POE, FG-140D-POE-T1, FG-200B, FG-200B-POE, FG-200D, FG-200D-POE, FG-240D, FG-240D-POE, FG-280D-POE, FG-300C, FG-300D, FG-310B, FG-311B, FG-400D, FG-500D, FG-600D, FG-900D, FG-600C, FG-620B, FG-621B, FG-800C, FG-800D, FG-1000C, FG-1000D, FG-1200D, FG-1240B, FG-1500D, FG-1500DT, FG-3000D, FG-3016B, FG-3040B, FG-3100D, FG-3140B, FG-3200D, FG-3240C, FG-3600C, FG-3700D, FG-3700DX, FG-3810A, FG-3810D, FG-3815D, FG-3950B, FG-3951B FortiGate 5000 Series: FG-5001A, FG-5001A-SW, FG-5001A-LENC, FG-5001A-DW-LENC, FG-5001A-SW-LENC, FG-5001B, FG-5001C, FG-5001D, FG-5101C FortiGate DC: FG-80C-DC, FG-300C-DC, FG-310B-DC, FG-600C-DC, FG-620B-DC, FG-621B-DC, FG-800C-DC, FG-1000C-DC, FG-1240B-DC, FGT-1500D-DC, FG-3000D-DC, FG-3040B-DC, FG-3100D-DC, FG-3140B-DC, FG-3200D-DC, FG-3240C-DC, FG-3600C-DC, G-3700D-DC, FG-3810A-DC, FG-3810D-DC, FG-3815D-DC, FG-3950B-DC, FG-3951B-DC FortiGate Low Encryption: FG-20C-LENC, FG-40C-LENC, FG-60C-LENC, FG-80C-LENC, FG-100D-LENC, FG-200B-LENC, FG-300C-LENC, FG-620B-LENC, FG-1000C-LENC, FG-1240B-LENC, FG-3040B-LENC, FG-310B-LENC, FG-600C-LENC, FG-3140B-LENC, FG-3810A-LENC, FG-3950B-LENC FortiWiFi: FWF-20C, FWF-20C-ADSL-A, FWF-30D, FWF-30D-POE, FWF-40C, FWF-60C, FWF-60CM, FWF-60CX-ADSL-A, FWF-60D, FWF-60D-3G4G-VZW, FWF-60D-POE, FWF-80CM, FWF-81CM, FWF-90D, FWF-90D-POE, FWF-92D FortiGate Rugged: FGR-60D, FGR-100C FortiGate VM: FG-VM-Azure, FG-VM, FG-VM64, FG-VM64-HV, FG-VM64-KVM, FG-VM64-XEN FortiSwitch: FS-5203B, FCT-5902D	5.2

Model	Firmware Version
FortiGate: FG-20C, FG-20C-ADSL-A, FG-30D, FG-30D-POE, FG-40C, FG-60C, FG-60C-POE, FG-60C-SFP, FG-60D, FG-60D-3G4G-VZW, FG-60D-POE, FG-70D, FG-70D-POE, FG-80C, FG-80CM, FG-80D, FG-90D, FG-90D-POE, FG-92D, FG-94D-POE, FG-98D-POE, FG-100D, FG-110C, FG-111C, FG-140D, FG-140D-POE, FG-140D-POE-T1, FG-200B, FG-200B-POE, FG-200D, FG-200D-POE, FG-240D, FG-240D-POE, FG-280D-POE, FG-300C, FG-300D, FG-310B, FG-311B, FG-500D, FG-600C, FG-620B, FG-621B, FG-700D, FG-800C, FG-900D, FG-1000C, FG-1000D, FG-1200D, FG-1240B, FG-1500D, FG-3000D, FG-3016B, FG-3040B, FG-3100D, FG-3140B, FG-3200D, FG-3240C, FG-3600C, FG-3700D, FG-3810A, FG-3950B, FG-3951B FortiGate 5000 Series: FG-5001A, FG-5001A-SW, FG-5001A-LENC, FG-5001A-DW-LENC, FG-5001A-SW-LENC, FG-5001B, FG-5001C, FG-5001D, FG-5101C FortiGate DC: FG-80C-DC, FG-300C-DC, FG-310B-DC, FG-600C-DC, FG-620B-DC, FG-621B-DC, FG-800C-DC, FG-1000C-DC, FG-1240B-DC, FG-3000D-DC, FG-3040B-DC, FG-3100D-DC, FG-3140B-DC, FG-3200D-DC, FG-3240C-DC, FG-3600C-DC, FG-3700D-DC, FG-3810A-DC, FG-3950B-DC, FG-3951B-DC FortiGate Low Encryption: FG-20C-LENC, FG-40C-LENC, FG-60C-LENC, FG-80C-LENC, FG-100D-LENC, FG-200B-LENC, FG-300C-LENC, FG-310B-LENC, FG-600C-LENC, FG-620B-LENC, FG-1000C-LENC, FG-1240B-LENC, FG-3040B-LENC, FG-3140B-LENC, FG-3810A-LENC, FG-3950B-LENC FortiWiFi: FWF-20C, FWF-20C-ADSL-A, FWF-30D, FWF-30D-POE, FWF-40C, FWF-60C, FWF-60CM, FWF-60CX-ADSL-A, FWF-60D, FWF-60D-POE, FWF-60D-3G4G-VZW, FWF-80CM, FWF-81CM, FWF-90D, FWF-90D-POE, FWF-92D FortiGate Rugged: FGR-60D, FGR-90D, FGR-100C FortiGateVoice: FGV-40D2, FGV-70D4 FortiGate VM: FG-VM, FG-VM64, FG-VM64-AWS, FG-VM64-AWSONDEMAND, FG-VM64-HV, FG-VM64-KVM, FG-VM64-XEN FortiSwitch: FS-5203B	5.0

FortiCarrier Models

Model	Firmware Version
FortiCarrier: FCR-3000D, FCR-3100D, FCR-3200D, FCR-3700D, FCR-3700DX, FCR-3800D, FCR-3810D, FCR-3815D, FCR-5001C, FCR-5001D, FCR-3000D-DC, FCR-3100D-DC, FCR-3200D-DC, FCR-3240C, FCR-3600C, FCR-3700D-DC, FCR-3810D-DC, FCR-5001C FortiCarrier DC: FCR-3000D-DC, FCR-3100D-DC, FCR-3200D-DC, FCR-3240C-DC, FCR-3600C-DC, FCR-3700D-DC, FCR-3810D-DC, FCR-3815D-DC FortiCarrier VM: FCR-VM, FCR-VM64, FCR-VM64-AWS, FCR-VM64-AWSONDEMAND, FCR-VM64-HV, FCR-VM64-KVM	5.4
FortiCarrier: FCR-3000D, FCR-3100D, FCR-3200D, FCR-3240C, FCR-3600C, FCR-3700D, FCR-3700DX, FCR-3810A, FCR-3810D, FCR-3815D, FCR-3950B, FCR-3951B, FCR-5001A, FCR-5001B, FCR-5001C, FCR-5001D, FCR-5101C, FCR5203B, FCR-5902D FortiCarrier DC: FCR-3000D-DC, FCR-3100D-DC, FCR-3200D-DC, FCR-3700D-DC, FCR-3810D-DC FortiCarrier Low Encryption: FCR-5001A-DW-LENC FortiCarrier VM: FCR-VM, FCR-VM64, FCR-VM64-HV, FCR-VM64-KVM, FCR-VM64-XEN, FCR-VM64-AWSONDEMAND	5.2
FortiCarrier: FCR-3240C, FCR-3600C, FCR-3810A, FCR-3950B, FCR-3951B, FCR-5001A, FCR-5001B, FCR-5001C, FCR-5001D, FCR-5101C FortiCarrier DC: FCR-3240C-DC, FCR-3600C-DC, FCR-3810A-DC, FCR-3950B-DC, FCR-3951B-DC FortiCarrier Low Encryption: FCR-5001A-DW-LENC FortiCarrier VM: FCR-VM, FCR-VM64	5.0

FortiDDoS models

Model	Firmware Version
FortiDDoS: FI-200B, FI-400B, FI-600B, FI-800B, FI-900B, FI-1000B, FI-1200B, FI-2000B	4.2, 4.1, 4.0

FortiAnalyzer models

Model	Firmware Version
FortiAnalyzer: FAZ-200D, FAZ-300D, FAZ-400E, FAZ-1000D, FAZ-1000E, FAZ-2000B, FAZ-2000E, FAZ-3000D, FAZ-3000E, FAZ-3000F, FAZ-3500E, FAZ-3500F, FAZ-3900E, and FAZ-4000B. FortiAnalyzer VM: FAZ-VM64, FAZ-VM64-Azure, FAZ-VM64-HV, FAZ-VM64-XEN (Citrix XenServer and Open Source Xen), FAZ-VM64-KVM, and FAZ-VM64-AWS.	5.4
FortiAnalyzer: FAZ-100C, FAZ-200D, FAZ-200E, FAZ-300D, FAZ-400C, FAZ-400E, FAZ-1000C, FAZ-1000D, FAZ-1000E, FAZ-2000B, FAZ-3000D, FAZ-3000E, FAZ-3000F, FAZ-3500E, FAZ-3500F, FAZ-3900E, FAZ-4000B FortiAnalyzer VM: FAZ-VM, FAZ-VM-AWS, FAZ-VM64, FAZ-VM64-Azure, FAZ-VM64-HV, FAZ-VM64-KVM, FAZ-VM64-XEN	5.2
FortiAnalyzer: FAZ-100C, FAZ-200D, FAZ-200E, FAZ-300D, FAZ-400B, FAZ-400C, FAZ-400E, FAZ-1000B, FAZ-1000C, FAZ-1000D, FAZ-1000E, FAZ-2000A, FAZ-2000B, FAZ-3000D, FAZ-3000E, FAZ-3000F, FAZ-3500E, FAZ-3500F, FAZ-4000A, FAZ-4000B FortiAnalyzer VM: FAZ-VM, FAZ-VM64, FAZ-VM64-AWS, FAZ-VM64-Azure, FAZ-VM64-HV, FAZ-VM-KVM, FAZ-VM-XEN	5.0

FortiMail models

Model	Firmware Version
FortiMail: FE-60D, FE-200D, FE-200E, FE-400C, FE-400E, FE-1000D, FE-2000B, FE-2000E, FE-3000C, FE-3000D, FE-3000E, FE-3200E, FE-5002B FortiMail Low Encryption: FE-3000C-LENC FortiMail VM: FE-VM64, FE-VM64-HV, FE-VM64-XEN	5.3.7
FortiMail: FE-60D, FE-200D, FE-200E, FE-400C, FE-400E, FE-1000D, FE-2000B, FE-3000C, FE-3000D, FE-5002B FortiMail VM: FE-VM64, FE-VM64-HV, FE-VM64-XEN	5.2.8
FortiMail: FE-100C, FE-200D, FE-200E, FE-400B, FE-400C, FE-400E, FE-1000D, FE-2000B, FE-3000C, FE-3000D, FE-5001A, FE-5002B FortiMail VM: FE-VM64	5.1.6
FortiMail: FE-100C, FE-200D, FE-200E, FE-400B, FE-400C, FE-1000D, FE-2000A, FE-2000B, FE-3000C, FE-3000D, FE-4000A, FE-5001A, FE-5002B FortiMail VM: FE-VM64	5.0.10

FortiSandbox models

Model	Firmware Version
FortiSandbox: FSA-1000D, FSA-3000D, FSA-3000E, FSA-3500D FortiSandbox VM: FSA-VM	2.3.2
FortiSandbox: FSA-1000D, FSA-3000D, FSA-3500D FortiSandbox VM: FSA-VM	2.2.0 2.1.0
FortiSandbox: FSA-1000D, FSA-3000D FortiSandbox VM: FSA-VM	2.0.0 1.4.2
FortiSandbox: FSA-1000D, FSA-3000D	1.4.0 and 1.4.1 1.3.0 1.2.0 and later

FortiSwitch ACTA models

Model	Firmware Version
FortiController: FTCL-5103B, FTCL-5902D, FTCL-5903C, FTCL-59	5.2.0
FortiSwitch-ATCA: FS-5003A, FS-5003B FortiController: FTCL-5103B, FTCL-5903C, FTCL-5913C	5.0.0
FortiSwitch-ATCA: FS-5003A, FS-5003B	4.3.0 4.2.0

FortiWeb models

Model	Firmware Version
FortiWeb: FWB-2000E	5.6.0
FortiWeb: FWB-100D, FWB-400C, FWB-400D, FWB-1000C, FWB-1000D, FWB-3000C, FWB-3000CFSX, FWB-3000D, FWB-3000DFSX, FWB-3000E, FWB-3010E, FWB-4000C, FWB-4000D, FWB-4000E FortiWeb VM: FWB-VM-64, FWB-XENAWS, FWB-XENOPEN, FWB-XENSERVR, FWB-HYPERV, FWB-KVM, FWB-AZURE	5.5.3

Model	Firmware Version
FortiWeb: FWB-100D, FWB-400C, FWB-1000C, FWB-3000C, FWB-3000CFSX, FWB-3000D, FWB-3000DFSX, FWB-3000E, FWB-4000C, FWB-4000D, FWB-4000E FortiWeb VM: FWB-VM64, FWB-XENAWS, FWB-XENOPEN, FWB-XENSERVR, FWB-HYPERV	5.4.1
FortiWeb: FWB-100D, FWB-400B, FWB-400C, FWB-1000B, FWB-1000C, FWB-1000D, FWB-3000C, FWB-3000CFSX, FWB-3000D, FWB-3000DFSX, FWB-3000E, FWB-4000C, FWB-4000D, FWB-4000E FortiWeb VM: FWB-VM64, FWB-XENAWS, FWB-XENOPEN, FWB-XENSERVR, and FWB-HYPERV	5.3.8
FortiWeb: FWB-100D, FWB-400B, FWB-400C, FWB-1000B, FWB-1000C, FWB-1000D, FWB-3000C, FWB-3000CFSX, FWB-3000D, FWB-3000DFSX, FWB-3000E, FWB-4000C, FWB-4000D, FWB-4000E FortiWeb VM: FWB-VM64, FWB-HYPERV, FWB-XENAWS, FWB-XENOPEN, FWB-XENSERVR	5.2.4

FortiCache models

Model	Firmware Version
FortiCache: FCH-400C, FCH-400E, FCH-1000C, FCH-1000D, FCH-3000C, FCH-3000D, FortiCache-3000E, FCH-3900E FortiCache VM: FCH-VM64, FortiCache-KVM	4.1
FortiCache: FCH-400C, FCH-400E, FCH-1000C, FCH-1000D, FCH-3000C, FCH-3000D, FCH-3900E FortiCache VM: FCH-VM64	4.0

Resolved Issues

The following issues have been fixed in FortiAnalyzer version 5.4.3. For inquiries about a particular bug, please contact [Customer Service & Support](#).

Device Manager

Bug ID	Description
376207	FortiAnalyzer may show incorrect version for FortiDDoS devices.
382831	After user deletes a VDOM on FortiGate, the VDOM may not be moved on FortiAnalyzer.
392665	FortiAnalyzer may not support HA configurations for non-FortiGate devices.
403992	FortiAnalyzer may recognize an FOS VM as a syslog device.

Event Management

Bug ID	Description
404888	The Event Handler List may become empty after FortiAnalyzer is upgraded.
385275	The HA failover event handler cannot be triggered.

Logging

Bug ID	Description
378763	When SFTP server is down, FortiAnalyzer should continue to try to re-establish SFTP connection.
383415	Chart name with spaces may not be supported.
395041	The application category may be displayed as "appcat =Not.Scanned".
401257	FortiAnalyzer may return Internal error when uploading logs.
405407	The upload process may attempt three times to upload a log file that is no longer available.
406703	Smart Action filter may not work as expected.

Reporting

Bug ID	Description
390502	Users may not be able to clone reports <i>User Top 500 Websites by Bandwidth</i> and <i>User Top 500 Websites by Session</i> .

System Settings

Bug ID	Description
402947	Disk I/O Utilization widget shows incorrect time scale.
375393	Admin users with <i>FortiView : Read-Only</i> may be able to delete log files.

Others

Bug ID	Description
395089	After disabling log-auto-deletion, it may still work as enabled.
399792	The XML API, <code>searchFaLog</code> , cannot find logs when device Name is the same as the HA cluster name.
400905	Both commands, <code>execute log device logstore clear <device_id></code> and <code>execute log device logstore clear ALL</code> , may not work.
405163	The password for the FTP server to receive reports may be corrupted after upgrade.
412199	FortiAnalyzer may fail to restore logs via SCP.
412606	The command <code>execute sql-report list-lang</code> may be empty.
412636	The SNMP trap with OID <code>fmTrapLogRateThreshold</code> may be triggered too often.
418215	<code>oftpd</code> crashes may prevent users from logging in from GUI.

Common Vulnerabilities and Exposures

Bug ID	Description
401614	FortiAnalyzer 5.4.3 is no longer vulnerable to the following TMP Reference: <ul style="list-style-type: none">• 2012-6704 Visit https://fortiguard.com/psirt for more information.
402095	FortiAnalyzer 5.4.3 is no longer vulnerable to the following CVE-Reference: <ul style="list-style-type: none">• 2016-10009• 2016-10011 Visit https://fortiguard.com/psirt for more information.
404282	FortiAnalyzer 5.4.3 is no longer vulnerable to the following CVE-Reference: <ul style="list-style-type: none">• 2017-3126 Visit https://fortiguard.com/psirt for more information.
405120	FortiAnalyzer5.4.3 is no longer vulnerable to the following CVE-References: <ul style="list-style-type: none">• 2016-7055• 2017-3730• 2017-3731• 2017-3732 Visit https://fortiguard.com/psirt for more information.
408241	FortiAnalyzer5.4.3 is no longer vulnerable to the following CVE-Reference: <ul style="list-style-type: none">• 2015-8874• 2016-10166• 2016-10167• 2016-10168• 2016-5766• 2016-5767• 2016-6128• 2016-6132• 2016-6207• 2016-6912• 2016-9317 Visit https://fortiguard.com/psirt for more information.
416912	FortiAnalyzer5.4.3 is no longer vulnerable to the following CVE-Reference: <ul style="list-style-type: none">• 2016-10229 Visit https://fortiguard.com/psirt for more information.

Known Issues

The following issues have been identified in FortiAnalyzer version 5.4.3. For inquiries about a particular bug or to report a bug, please contact [Fortinet Customer Service & Support](#).

FortiView

Bug ID	Description
423221	FortiView may not be able to display IPS logs with DNAT.

Reporting


Bug ID	Description
405484	<i>Attack Name</i> may be missing in the <i>Top Attacks</i> chart in XML, CSV and CLI formats. Workaround: Right click the chart and select <i>Clone Chart</i> . In the pop up window, change the <i>Icon-Attack</i> to <i>Default</i> , save the chart and re-run report.

System Settings

Bug ID	Description
415536	Log roll may be delayed when the log roll time is at the default 0:00.

Others

Bug ID	Description
409905	Users may not be able to login via GUI when <code>ncirc1 ip360</code> vulnerability scanner is being run on FortiAnalyzer.

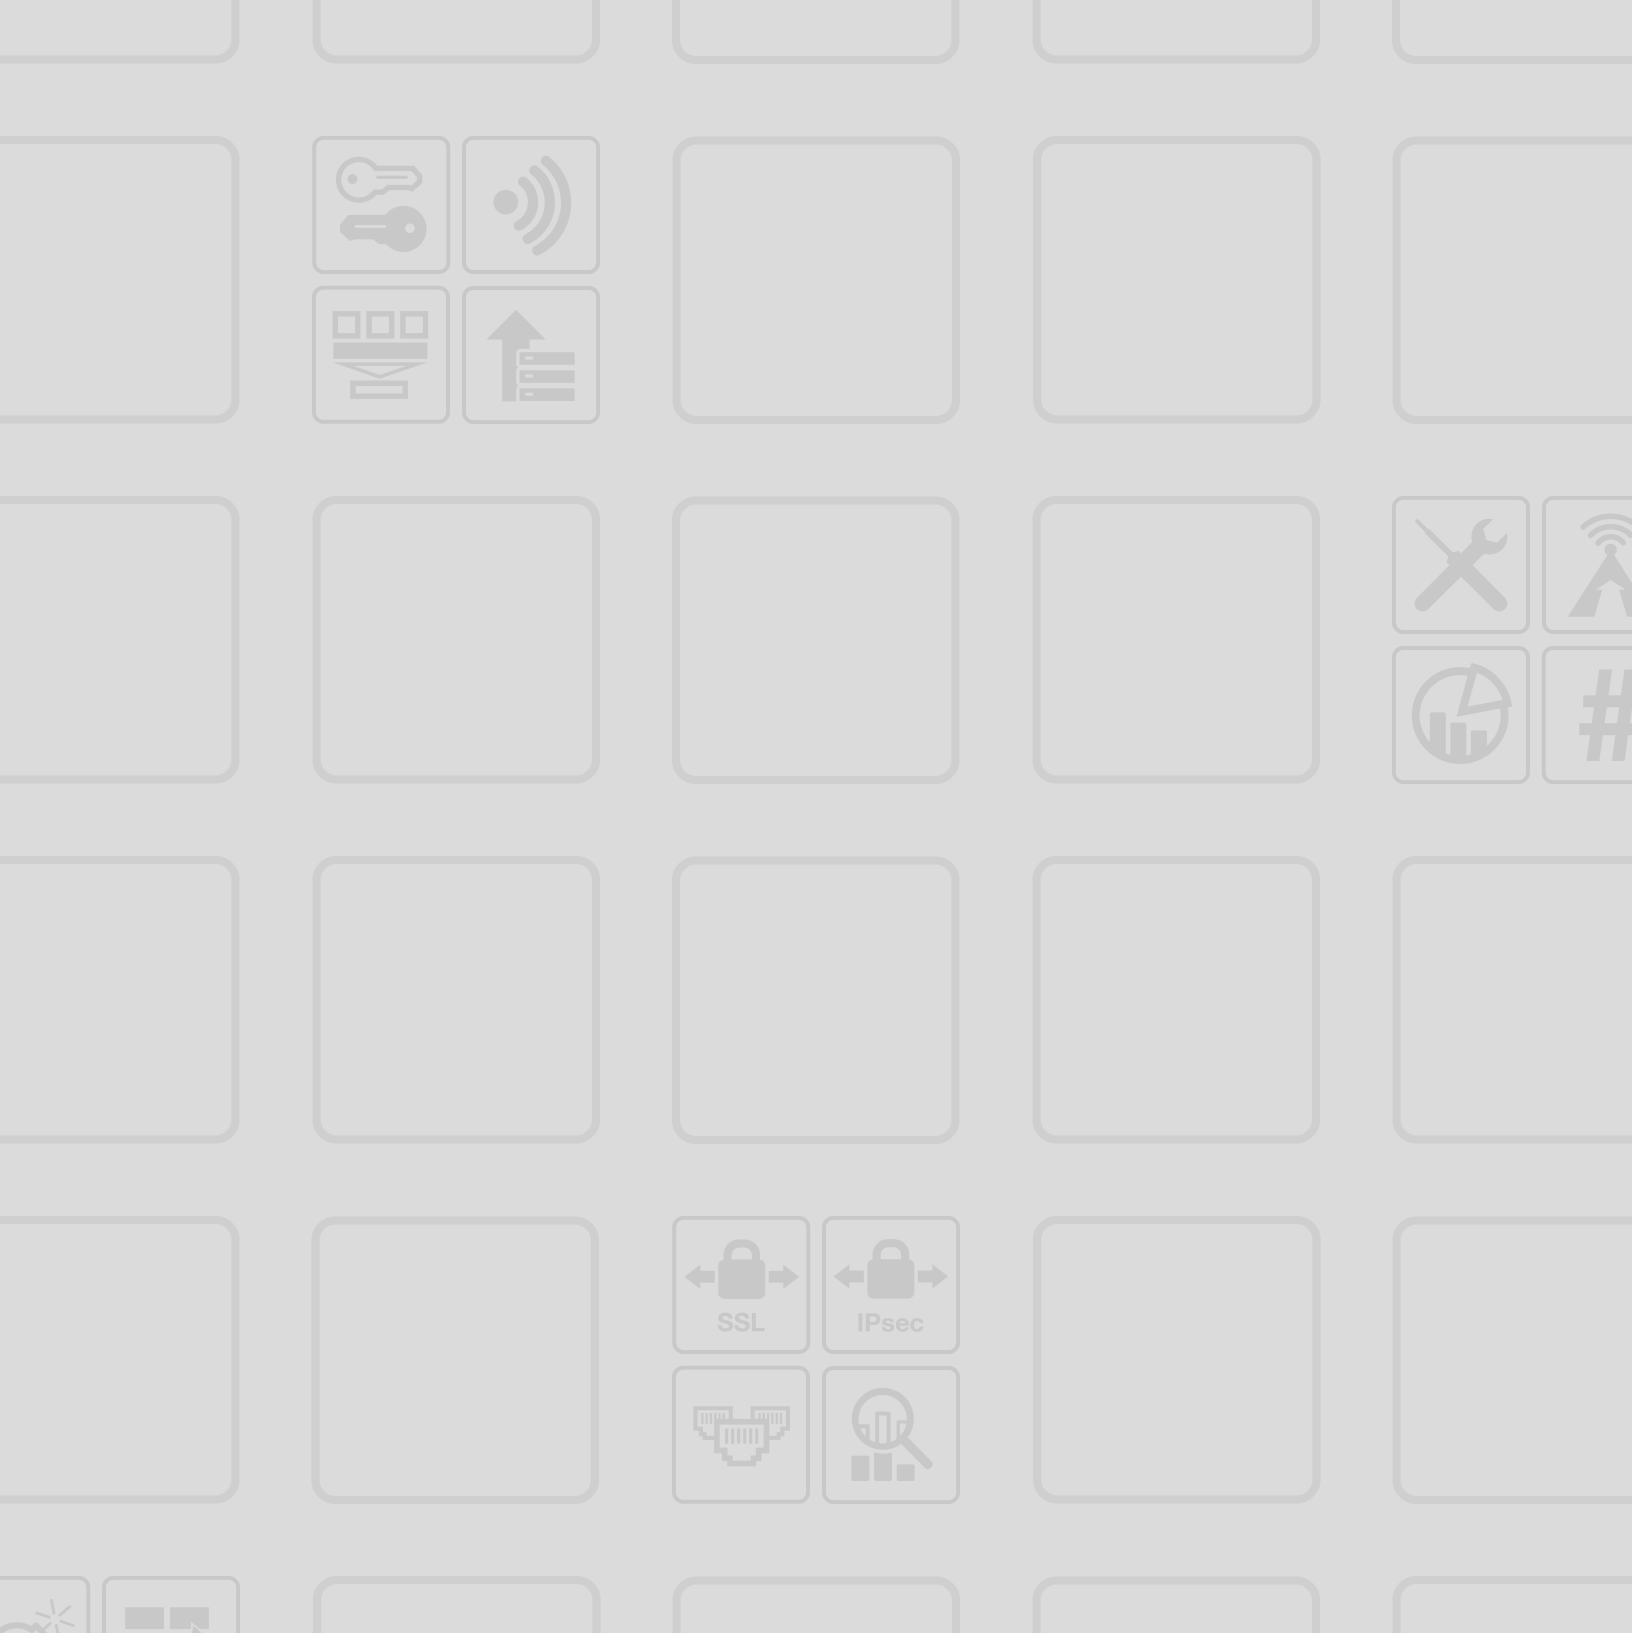

FORTINET®

High Performance Network Security



Copyright© 2017 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., in the U.S. and other jurisdictions, and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. In no event does Fortinet make any commitment related to future deliverables, features or development, and circumstances may change such that any forward-looking statements herein are not accurate. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.